


2/2 Ways SS Solenoid valve MPW-363

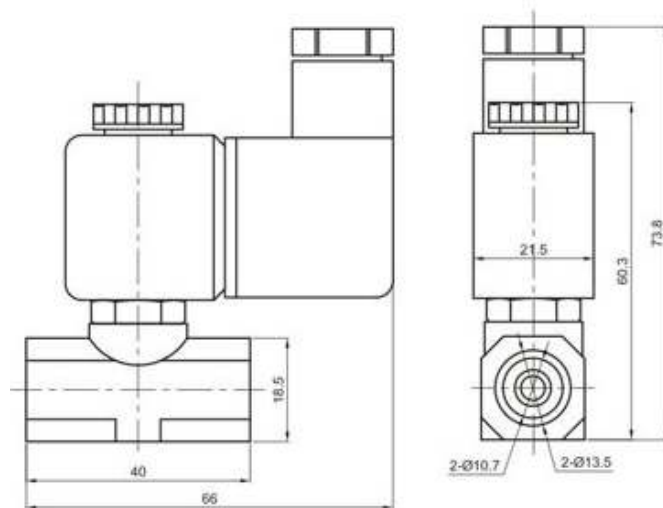

- **Stainless steel valve body mainly used for drinking water**
- **High reliability, long life**
- **Good tightness' in low pressure**
- **Working medium: Air/water**
- **Working pressure : air: 0-7 Bar**
- **Max. pressure : 16 Bar (,61 MPa)**
- **Ambient temperature : -20 to + 80 °C**
- **working temperature : -20 to + 120 °C**
- **connection ports G1/4" , orifice DN2,5**
- **kv factor = 3.3 L/min**
- **Body : SS304 (standard)**
- **Seal : Silicon**
- **Fluid Viscosity < 20 CST**
- **Normal close**
- **Direct acting**
- **Voltage tolerance +- 10%**
- **Standard Voltage 230 V 50 Hz , available on request 12 VDC, 24 VDC, 24 VAC**
- **Power consumption Watt 7 VA ,**
- **Valve can work at any operation position**
- **Electric connector specification : DIN43650 , IP65**