


2/2 Ways SS Solenoid valve MPW-156

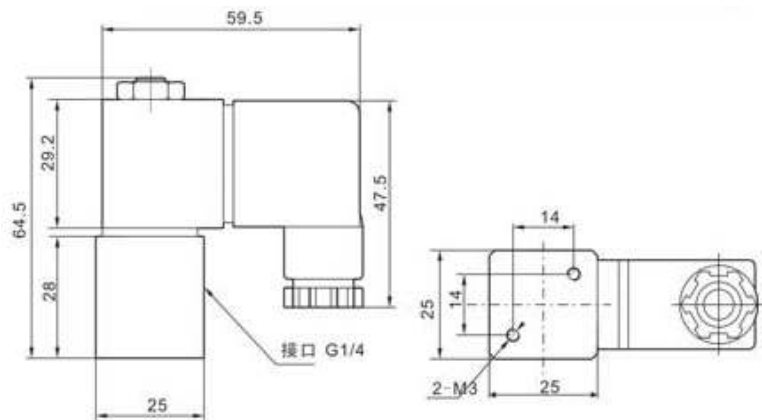

- Stainless steel valve body 2/2 or 3/2 option
- High reliability, long life
- Good tightness' in low pressure
- Working medium: Air/water
- Working pressure : air: 0-8 Bar
- Max. pressure : 16 Bar (1,6 MPa)
- Ambient temperature : -20 to + 80 °C
- working temperature : -20 to + 95 °C
- connection ports G1/4" , orifice DN2 mm
- kv factor = 2.4 L/min
- Body : SS304 (standard)
- Seal : FPM
- Fluid Viscosity < 20 CST
- Normal close
- Direct acting
- Voltage tolerance +- 10%
- Standard Voltage 230 V 50 Hz , available on request 12 VDC, 24 VDC, 24 VAC
- Power consumption Watt 6 VA ,
- Valve can work at any operation position
- Electric connector specification : DIN43650 , IP65